



计算机科学与工程系

Department of Computer Science and Engineering

CS 315 Computer Security Course

Lab 7: Firewall & Intrusion Detection Systems



Introduction

In this lab students will explore the Snort Intrusion Detection Systems. The students will study Snort IDS, a signature based intrusion detection system used to detect network attacks. Snort can also be used as a simple packet logger. For the purpose of this lab the students will use snort as a packet sniffer and write their own IDS rules.


Software Requirements

All required files are packed and configured in the provided virtual machine image.


- The VMWare Software
<http://apps.eng.wayne.edu/MPStudents/Dreamspark.aspx>
- The Ubuntu 14.04 Long Term Support (LTS) Version
<http://www.ubuntu.com/download/desktop>
- Snort: A signature-based Intrusion Detection System
<https://www.snort.org/#get-started>

Starting the Lab 7 Virtual Machine

In this lab, we use Ubuntu as our VM image. Select the VM named “Lab8.”

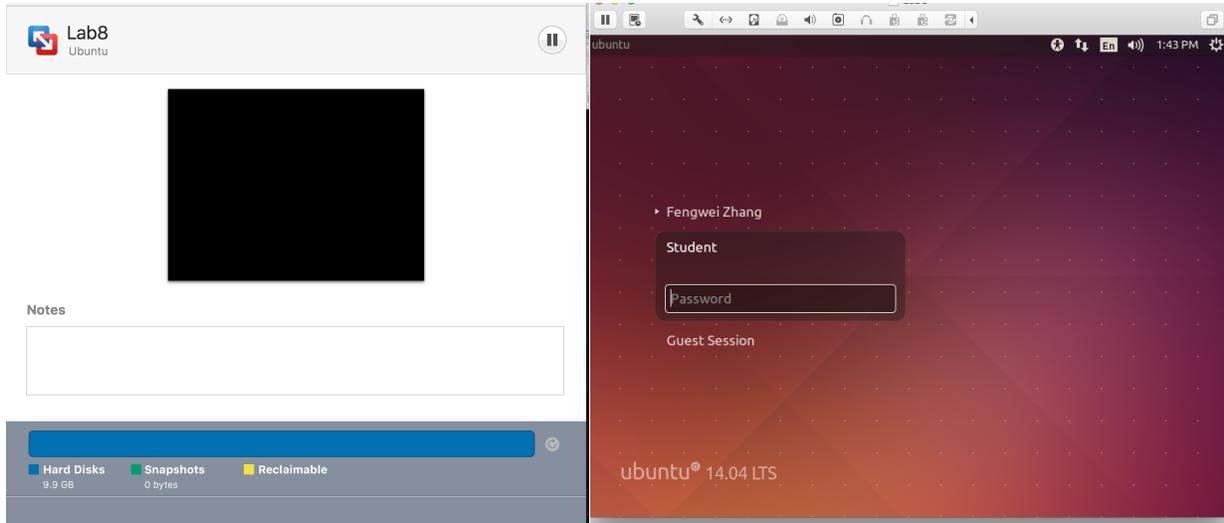

Login the Ubuntu image with username student, and password [TBA in the class]. Below is the screen snapshot after login.

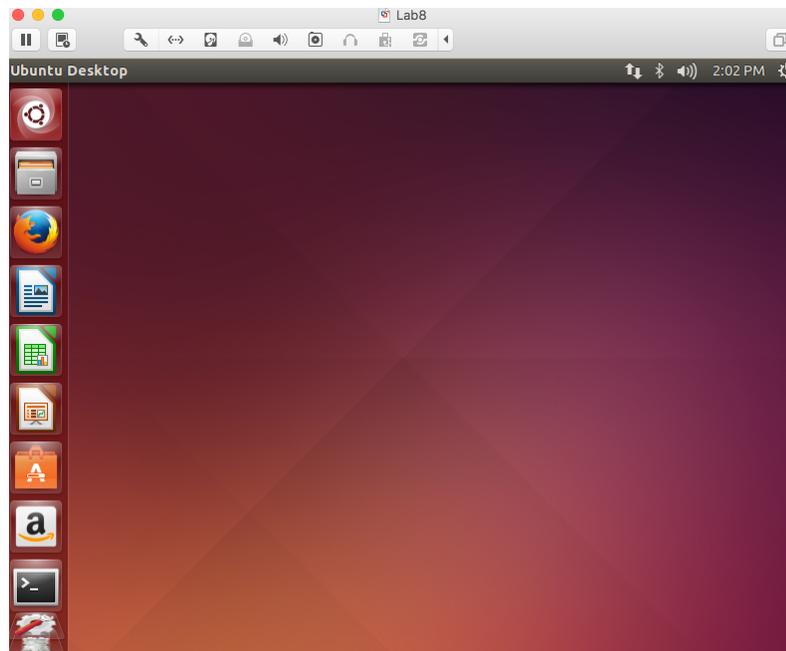

Installing Snort into the Operating System



In our Lab 7 Ubuntu VM image, the snort has been installed and setup for you. If you want to use your own version of the image, you need to install snort into the operating system. To install the latest version of the snort, you can follow the installation instruction from the snort website. Note that installation instructions are vary from OSes. The instruction below shows how to install snort from its source code on Linux.

```
Source  Fedora  Centos  FreeBSD  Windows

wget https://www.snort.org/downloads/snort/daq-2.0.6.tar.gz
wget https://www.snort.org/downloads/snort/snort-2.9.8.2.tar.gz

tar xvfz daq-2.0.6.tar.gz
cd daq-2.0.6
./configure && make && sudo make install

tar xvfz snort-2.9.8.2.tar.gz
cd snort-2.9.8.2
./configure --enable-sourcefire && make && sudo make install
```

You can find more information here:

<https://www.snort.org/#get-started>

While you install the snort, you system may miss some libraries. You need to install the required libraries, too.

Configuring and Starting the Snort IDS



After installing the Snort, we need to configure it. The configuration file of snort is stored at `/etc/snort/snort.conf`. The screenshot below shows the commands to configure the Snort. You need to switch to root to gain the permission to read the snort configurations file.

```
root@ubuntu: /home/student
student@ubuntu:~$ sudo su
[sudo] password for student:
root@ubuntu:/home/student# vim /etc/snort/snort.conf
root@ubuntu:/home/student#
```

After configuring the Snort, you need to start the Snort. You can simply type the following command to start the service.

```
$ service snort start
```


or

```
$ /etc/init.d/snort start
```

```
root@ubuntu: /home/student
root@ubuntu:/home/student# service snort start
* Starting Network Intrusion Detection System snort [ OK ]
root@ubuntu:/home/student# /etc/init.d/snort start
* Starting Network Intrusion Detection System snort [ OK ]
root@ubuntu:/home/student#
root@ubuntu:/home/student#
```

Snort Rules

Snort is a signature-based IDS, and it defines rules to detect the intrusions. All rules of Snort are stored under `/etc/snort/rules` directory. The screenshot below shows the files that contain rules of Snort.

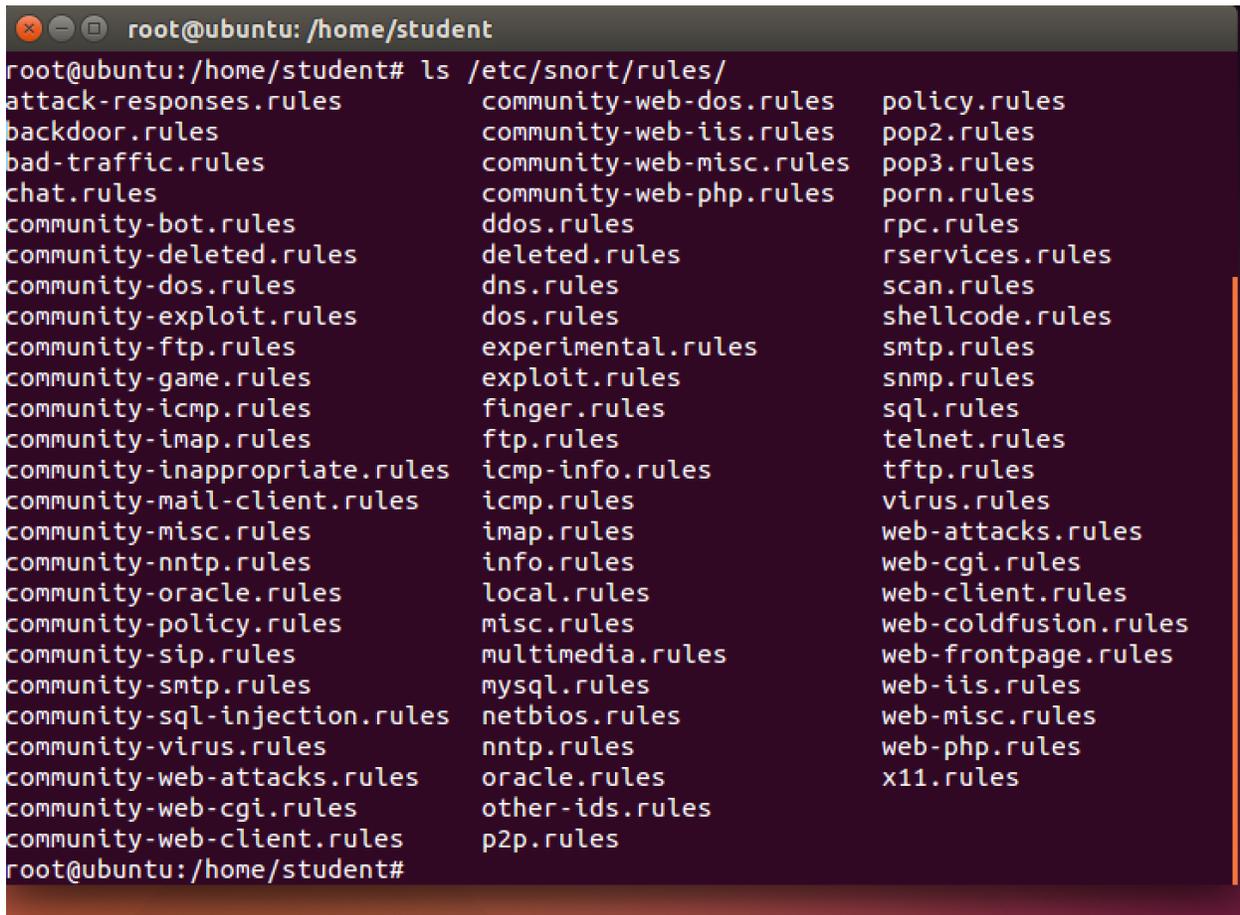

```
root@ubuntu: /home/student
root@ubuntu:/home/student# ls /etc/snort/rules/
attack-responses.rules      community-web-dos.rules    policy.rules
backdoor.rules             community-web-iis.rules    pop2.rules
bad-traffic.rules          community-web-misc.rules   pop3.rules
chat.rules                  community-web-php.rules    porn.rules
community-bot.rules        ddos.rules                 rpc.rules
community-deleted.rules    deleted.rules              rservices.rules
community-dos.rules        dns.rules                  scan.rules
community-exploit.rules    dos.rules                  shellcode.rules
community-ftp.rules         experimental.rules         smtp.rules
community-game.rules       exploit.rules              snmp.rules
community-icmp.rules       finger.rules               sql.rules
community-imap.rules       ftp.rules                  telnet.rules
community-inappropriate.rules icmp-info.rules           tftp.rules
community-mail-client.rules icmp.rules                 virus.rules
community-misc.rules       imap.rules                 web-attacks.rules
community-nntp.rules       info.rules                 web-cgi.rules
community-oracle.rules     local.rules                web-client.rules
community-policy.rules     misc.rules                 web-coldfusion.rules
community-sip.rules        multimedia.rules           web-frontpage.rules
community-smtp.rules       mysql.rules                web-iis.rules
community-sql-injection.rules netbios.rules              web-misc.rules
community-virus.rules      nntp.rules                web-php.rules
community-web-attacks.rules oracle.rules                x11.rules
community-web-cgi.rules    other-ids.rules
community-web-client.rules p2p.rules
root@ubuntu:/home/student#
```

The screenshot below shows real rules in the `/etc/snort/rules/web-misc.rules`. The slides of Lab 7 has more information about Snort rules including syntax and format.

```
root@ubuntu: /home/student
alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS 443 (msg:"WEB-MISC SSLv2 Client Hello Challenge Length overflow attempt"; flow:to_server,established; flowbits:isnotset,ssl2.client_hello.request; flowbits:isnotset,ssl3.client_hello.request; flowbits:isnotset,tls1.client_hello.request; byte_test:1,>,127,0; content:"|01|"; depth:1; offset:2; byte_test:2,<,768,3; flowbits:set,ssl2.client_hello.request; byte_test:2,>,32,9; classtype:attempted-admin; sid:2656; rev:7;)
alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"WEB-MISC cross site scripting attempt"; flow:to_server,established; content:"<SCRIPT>"; nocase; classtype:web-application-attack; sid:1497; rev:6;)
alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"WEB-MISC cross site scripting HTML Image tag set to javascript attempt"; flow:to_server,established; content:"img src=javascript"; nocase; reference:bugtraq,4858; reference:cve,2002-0902; classtype:web-application-attack; sid:1667; rev:7;)
alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"WEB-MISC Cisco IOS HTTP configuration attempt"; flow:to_server,established; uri:content:"/level/"; uri:content:"/exec/"; reference:bugtraq,2936; reference:cve,2001-0537; classtype:web-application-attack; sid:1250; rev:11;)
alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"WEB-MISC Netscape Enterprise DOS"; flow:to_server,established; content:"REVLOG / "; depth:9; reference:bugtraq,2294; reference:cve,2001-0251; classtype:web-application-attack; sid:1047; rev:9;)
alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"WEB-MISC Netscape Enterprise directory listing attempt"; flow:to_server,established; content:"INDEX "; depth:6; reference:bugtraq,2285; reference:cve,2001-0250; classtype:web-application-attack; sid:1048; rev:9;)
@
28,1 5%
```

Writing and Adding a Snort Rule

Next, we are going to add a simple snort rule. You should add your own rules at /etc/snort/rules/local.rules. Add the following line into the local.rules file

```
alert icmp any any -> any any (msg:"ICMP Packet found"; sid:1000001; rev:1;)
```

Basically, this rule defines that an alert will be logged if an ICMP packet is found. The ICMP packet could be from any IP address and the rule ID is 1000001. Make sure to pick a SID greater 1000000 for your own rules. The screenshot below shows the contents of the local.rules file after adding the rule.

```
root@ubuntu: /home/student
# $Id: local.rules,v 1.11 2004/07/23 20:15:44 bmc Exp $
# -----
# LOCAL RULES
# -----
# This file intentionally does not come with signatures. Put your local
# additions here.
# Added by Fengwei Zhang, you need to add more rules here.....
alert icmp any any -> any any (msg:"ICMP Packet found - Fengwei"; sid:1000001; rev:1;)
~
~
~
~
"/etc/snort/rules/local.rules" 9L, 358C 1,1 All
```



To make the rule become effective, you need to restart the snort service by typing the following command.

```
$ service snort restart
```

or

```
$ /etc/init.d/snort restart
```

```
root@ubuntu: /home/student
root@ubuntu:/home/student# vim /etc/snort/rules/local.rules
root@ubuntu:/home/student# service snort restart
* Stopping Network Intrusion Detection System snort      [ OK ]
* Starting Network Intrusion Detection System snort      [ OK ]
root@ubuntu:/home/student#
root@ubuntu:/home/student#
```

Triggering an Alert for the New Rule

To trigger an alert for the new rule, you only need to send an ICMP message to the VM image where snort runs. First, you need to find the IP address of the VM by typing the following command.

```
$ ifconfig
```

For instance, the screenshot shows the execution result on my VM image, and the IP address is 172.16.108.242.



```
root@ubuntu: /home/student
root@ubuntu:/home/student# ifconfig
eth0      Link encap:Ethernet  HWaddr 00:0c:29:b5:9e:3c
          inet addr:172.16.108.242  Bcast:172.16.108.255  Mask:255.255.255.0
          inet6 addr: fe80::20c:29ff:feb5:9e3c/64  Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:279  errors:0  dropped:0  overruns:0  frame:0
          TX packets:192  errors:0  dropped:0  overruns:0  carrier:0
          collisions:0  txqueuelen:1000
          RX bytes:88956 (88.9 KB)  TX bytes:24319 (24.3 KB)
          Interrupt:19  Base address:0x2000

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128  Scope:Host
          UP LOOPBACK RUNNING  MTU:65536  Metric:1
          RX packets:66  errors:0  dropped:0  overruns:0  frame:0
          TX packets:66  errors:0  dropped:0  overruns:0  carrier:0
          collisions:0  txqueuelen:0
          RX bytes:6850 (6.8 KB)  TX bytes:6850 (6.8 KB)

root@ubuntu:/home/student#
```

Next, you can open a terminal in your host. If your host is a Windows OS, you can use one of the following two ways to open a terminal

1. Press "Win-R," type "cmd" and press "Enter" to open a Command Prompt session using just your keyboard.
2. Click the "Start | Program Files | Accessories | Command Prompt" to open a Command Prompt session using just your mouse.

After you have a terminal, you can just type the following command to send ping messages to the VM.

```
$ ping 172.16.108.242
```

After you send the ping messages, the alerts should be triggered and you can find the log messages in `/var/log/snort/snort.log`. However, the `snort.log` file will be in binary format. You need to use a tool, called `u2spewfoo`, to read it. The screenshot below shows the result of reading the snort alerts.



```
root@ubuntu: /home/student
root@ubuntu:/home/student# u2spewfoo /var/log/snort/snort.log

(Event)
  sensor id: 0      event id: 1      event second: 1489606608      event microsecond: 913258
  sig id: 1000001  gen id: 1      revision: 1      classification: 0
  priority: 0      ip source: 172.16.108.1 ip destination: 172.16.108.242
  src port: 8      dest port: 0    protocol: 1      impact_flag: 0  blocked: 0
  mpls label: 0    vland id: 0    policy id: 0

Packet
  sensor id: 0      event id: 1      event second: 1489606608
  packet second: 1489606608      packet microsecond: 913258
  linktype: 1      packet_length: 98
[  0] 00 0C 29 B5 9E 3C 00 50 56 C0 00 08 08 00 45 00  ..)..<.PV....E.
[ 16] 00 54 7B EC 00 00 40 01 CD A8 AC 10 6C 01 AC 10  .T{...@....l...
[ 32] 6C F2 08 00 67 D1 CA 45 00 00 58 C9 97 D0 00 0D  l...g..E..X....
[ 48] EA 3E 08 09 0A 0B 0C 0D 0E 0F 10 11 12 13 14 15  .>.....
[ 64] 16 17 18 19 1A 1B 1C 1D 1E 1F 20 21 22 23 24 25  ..... !"#%$
[ 80] 26 27 28 29 2A 2B 2C 2D 2E 2F 30 31 32 33 34 35  &'()*+,-./012345
[ 96] 36 37 67

(Event)
  sensor id: 0      event id: 2      event second: 1489606608      event microsecond: 913268
  sig id: 1000001  gen id: 1      revision: 1      classification: 0
  priority: 0      ip source: 172.16.108.242 ip destination: 172.16.108.1
  src port: 0      dest port: 0    protocol: 1      impact_flag: 0  blocked: 0
  mpls label: 0    vland id: 0    policy id: 0

Packet
  sensor id: 0      event id: 2      event second: 1489606608
  packet second: 1489606608      packet microsecond: 913268
  linktype: 1      packet_length: 98
[  0] 00 50 56 C0 00 08 00 0C 29 B5 9E 3C 08 00 45 00  .PV.....)..<..E.
[ 16] 00 54 D9 07 00 00 40 01 70 8D AC 10 6C F2 AC 10  .T....@.p...l...
[ 32] 6C 01 00 00 6F D1 CA 45 00 00 58 C9 97 D0 00 0D  l...o..E..X....
[ 48] EA 3E 08 09 0A 0B 0C 0D 0E 0F 10 11 12 13 14 15  .>.....
[ 64] 16 17 18 19 1A 1B 1C 1D 1E 1F 20 21 22 23 24 25  ..... !"#%$
```

You can see that the SID is 1000001, and the alerts are generated by the ICMP messages.



Assignments for Lab 7

1. Read the lab instructions above and finish all the tasks.
2. Answer the questions and justify your answers. Simple yes or no answer will not get any credits.
 - a. What is a zero-day attack?
 - b. Can Snort catch zero-day network attacks? If not, why not? If yes, how?
 - c. Given a network that has 1 million connections daily where 0.1% (not 10%) are attacks. If the IDS has a true positive rate of 95%, and the probability that an alarm is an attack is 95%. What is false alarm rate? (You may use the math approach from the slides.)
3. Write a rule that will fire when you browse to craigslist.org or another particular website from the machine Snort is running on; it should look for any outbound TCP request to craigslist.org and alert on it.
 - a. The rule you added (from the rules file)
 - b. A description of how you triggered the alert
 - c. The alert itself from the log file (after converting it to readable text)

Extra Credit (3pt): Write and add a snort rule for detecting VPNs; it should trigger an alert when a VPN service is running on your machine.

Happy Hacking!